




Flooring Adhesive

SPECIALLY FOR VINYL SHEETS, PLANKS & TILES

TECHNICAL DATA SHEET

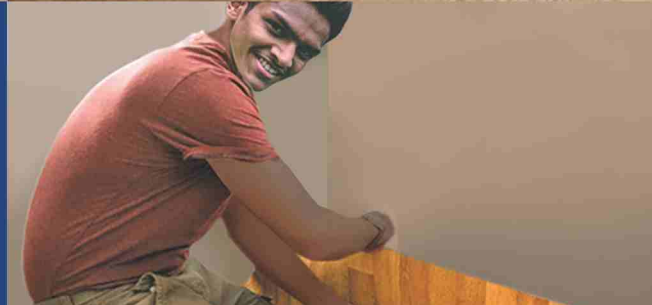

PHYSICAL DATA

Appearance : Light Viscous Yellowish Liquid **Main Solvent** : Hydrocarbon
Solid Contents : 20% - 21% **Main Ingredient** : Chloroprene
Viscosity at 27 °C : 1900 - 2400 cps

CHARACTERISTICS

- G-FLOOR Flooring Adhesive is a synthetic polychloroprene adhesive having stronger bonding properties, with good initial bond strength.
- Most suitable for bonding Vinyl sheets, planks and tiles to the subfloor. But also can be used for general purposes such as bonding leather, fabric and shoes, etc.

METHOD OF USE

SURFACE PREPARATIONS

- It is recommended to roughen the bonding surface to acquire better bonding results.
- Wipe off moisture, oil and all foreign matters on bonding surfaces.
- If necessary surface must be clean suitable organic solvents. (primer)

APPLICATION OF ADHESIVE

- Apply G-FLOOR Flooring Adhesive on the bonding surfaces evenly. On most bonding surfaces on coat is normally sufficient.
- However, for effective bonding on absorbent bonding surfaces such as leather two coats maybe required.
- Application should be carried out in well ventilated area.

DRYING OF ADHESIVE

- Typical drying time is 5-10 minutes for porous substrates. 15-30 minutes for non porous substrates.
- The optimum drying time will vary according to the room temperature and humidity and also the porosity of the surfaces to be bonded.

ASSEMBLY

- When touch dry, the adhesive coated surfaces can be positioned and pressed together.
- Hand pressure is normally adequate but a roller or press may be used with advantage, where applicable.
- Bonding strength can be fully obtained after 24 hours.

CAUTION

- Flush immediately with water if spill on skin.
- If spill on eye, flush immediately with water and seek immediate medical treatment.
- Highly inflammable product.

STORAGE

- Storage stability will be at least 9 month provided that the adhesive is stored in a dry and cool airtight container.

Hotline (+94) 77 238 4629



Manufactured & Marketed by

GLOBAL VINYL (PVT) LTD.

Showroom - 102, Havelock Road, Colombo 05, Sri Lanka.
T (+94) 11 243 5006 F (+94) 11 243 9656

www.globalvinyl.lk
 www.facebook.com/globalvinyl
 www.instagram.com/hetroflooring
 <https://twitter.com/globalvinyltd>

39
YEARS
TRUSTED EXPERIENCE